

Pilot Operating Handbook for aeroplane VL-3E-1



Registration number :

Serial number : **VL-3-**

Date :

VL-3E-1 Pilot Operating Handbook

0. Table of Contents

0.	Table of Contents	2
1.	General.....	5
1.1	Introduction	5
1.2	Warnings, cautions and notes	5
1.3	Descriptive data.....	6
1.3.1	Aeroplane description.....	6
1.3.2	Basic Technical data	7
1.4	Two-view drawing.....	8
2.	Limitations.....	9
2.1	Introduction	9
2.2	Airspeed limits	9
2.3	Airspeed indicator markings.....	9
2.4	Powerplant.....	10
2.5	Engine instrument markings	11
2.6	Miscellaneous instrument marking	11
2.7	Weight	12
2.8	Centre of gravity	12
2.9	Approved manoeuvres.....	12
2.10	Manoeuvring load factors	12
2.11	Crew	13
2.12	Kinds of operation.....	13
2.13	Fuel	13
2.14	Other limitations.....	13
2.15	Limitation placards	14
3.	Emergency procedures	15
3.1	Introduction	15
3.2	Engine failure.....	15
3.2.1	Engine failure during take-off run	15
3.2.2	Engine failure immediately after take-off	15
3.2.3	Engine failure in flight (Forced landing)	15
3.2.4	In-flight engine start.....	15
3.3	Smoke and fire.....	16
3.3.1	Fire on ground	16
3.3.2	Fire during take-off	16
3.3.3	Fire in flight	16
3.4	Glide.....	16
3.5	Landing emergencies.....	17
3.5.1	Emergency landing	17
3.5.2	Precautionary landing.....	17
3.5.3	Landing with a flat tire	17
3.5.4	Landing with a defective landing gear	17
3.5.5	Landing with landing gear in retracted position	17
3.5.6	Landing gear emergency extension	17
3.6	Recovery from unintentional spin	19
3.7	Other emergencies	19
3.7.1	Vibration	19
3.7.2	Carburettor icing	19
3.7.3	Alternator or power supply failure.....	19
3.7.4	Cabin opening in flight	19
3.7.5	Tranceiver communication failure	19
4.	Normal procedures	20

VL-3E-1 Pilot Operating Handbook

4.1	Introduction	20
4.2	Pre-flight inspection.....	20
4.3	Normal procedures.....	22
4.3.1	Before entering cockpit	22
4.3.2	After entering cockpit	22
4.3.3	Before engine starting and starting of engine.....	22
4.3.4	Engine warm up, engine check.....	23
4.3.5	Taxiing.....	23
4.3.6	Before take-off.....	23
4.3.7	Climb.....	24
4.3.8	Retraction and extension of the landing gear	24
4.3.9	Cruise	25
4.3.10	Descent.....	25
4.3.11	Check before landing	25
4.3.12	On base leg	25
4.3.13	On final	25
4.3.14	Landing.....	25
4.3.15	Balked landing or „go around“	26
4.3.16	After landing	26
4.3.17	Engine shut-down	26
4.3.18	Flight in rain.....	26
5.	Performance	27
5.1	Introduction	27
5.2	Performance.....	27
5.2.1	Airspeed indicator system calibration.....	27
5.2.2	Stall speeds	28
5.2.3	Take-off performance.....	28
5.2.4	Landing.....	28
5.2.5	Climb performance.....	28
5.3	Additional information	29
5.3.1	Cruise	29
5.3.2	Demonstrated crosswind performance	29
6.	Weight and Balance.....	30
6.1	Introduction	30
6.2	Permitted payload range.....	30
6.2.1	Weight limitations	30
6.2.2	C.G. calculation.....	30
7.	Aeroplane and Systems Description.....	32
7.1	Introduction	32
7.2	Airframe	32
7.2.1	Fuselage	32
7.2.2	Wing	32
7.2.3	Horizontal Tail Unit	32
7.3	Instrument panels and controls in the cockpit.....	33
7.4	Landing gear.....	34
7.5	Seats and Safety harness	34
7.6	Baggage compartment.....	34
7.7	Canopy	34
7.8	Engine	34
7.9	Fuel system	34
7.10	Electrical system	35
7.11	Hydraulic system.....	35
7.12	Pitotstatic system.....	35
7.13	Miscellaneous equipment.....	35

VL-3E-1 Pilot Operating Handbook

7.14	Avionics	35
8.	Aeroplane handling, servicing and maintenance	36
8.1	Introduction	36
8.2	Aeroplane inspection periods.....	36
8.3	Aeroplane alterations or repairs	36
8.4	Ground handling / Road transport.....	36
8.4.1	Towing	36
8.4.2	Parking.....	36
8.4.3	Tying-Down	37
8.4.4	Lifting.....	37
8.4.5	Road transport	37
8.4.6	Aeroplane disassembly and assembly.....	37
9.	Supplements.....	38
9.1	Introduction	38
9.2	List of inserted supplements.....	38
9.3	Supplements inserted	39

VL-3E-1 Pilot Operating Handbook

1. General

1.1 Introduction

This Pilot Operating Handbook provides information useful for the safe and efficient operation of VL-3E-1 Evolution aeroplane. It also contains supplemental data supplied by the aeroplane manufacturer.

1.2 Warnings, cautions and notes

The following definitions apply to warnings, cautions and notes in the flight manual.

Warning

Means that the non-observation of the corresponding procedure leads to an immediate or important degradation of the flight safety.

Caution

Means that the non-observation of the corresponding procedure leads to a minor or to a more or less long term degradation of the flight safety.

Note

Draws the attention of any special item not directly related to safety but which is important or unusual.

VL-3E-1 Pilot Operating Handbook

1.3 Descriptive data

1.3.1 Aeroplane description

VL-3E-1 Evolution aeroplane is intended for recreational and cross-country flying. It is not approved for aerobatic operation.

VL-3E-1 Evolution is a single engine, composite aeroplane with two side-by-side seats. The aeroplane is equipped with retractable tricycle landing gear with a steerable nose wheel. The fuselage is a carbon shell with carbon/kevlar seats integrated

The wing is a monospar construction with a sandwich skin composed of two layers of carbon and special foam. Control surfaces and empennage is of the same construction.

The aeroplane is controlled by dual push-pull control system, rudder drive is controlled by cables and on the right elevator is trim connected by 2 cables with trim lever. The ailerons and elevator are controlled by the control stick located between the pilot's legs (co-pilot's). The rudder is controlled by the rudder pedals, flaps are manually operated by a control lever located between the pilots on the fuselage main spar.

VL-3E-1 Pilot Operating Handbook

1.3.2 Basic Technical data

Wing

span	8.44 m
area of wing	9.8 m ²
M.A.C.	1,236 m
loading	46 kg/m ²

Ailerons

area	0.207 m ²
------------	----------------------

Flaps

area	0.8 m ²
------------	--------------------

Fuselage

length	6.2 m
width	1.15 m
height	1.5 m

Horizontal tail unit

span	2.68 m
area	1.69 m ²
elevátor area	0.73 m ²

Vertical tail unit



height	1.03 m
area	0.876 m ²
rudder area	0.309 m ²

Landing gear

wheel track	1.83 m
wheel base	1.285 m
main wheel diameter	0.35 m
nose wheel diameter	0.3 m

VL-3E-1 Pilot Operating Handbook

1.4 Two-view drawing

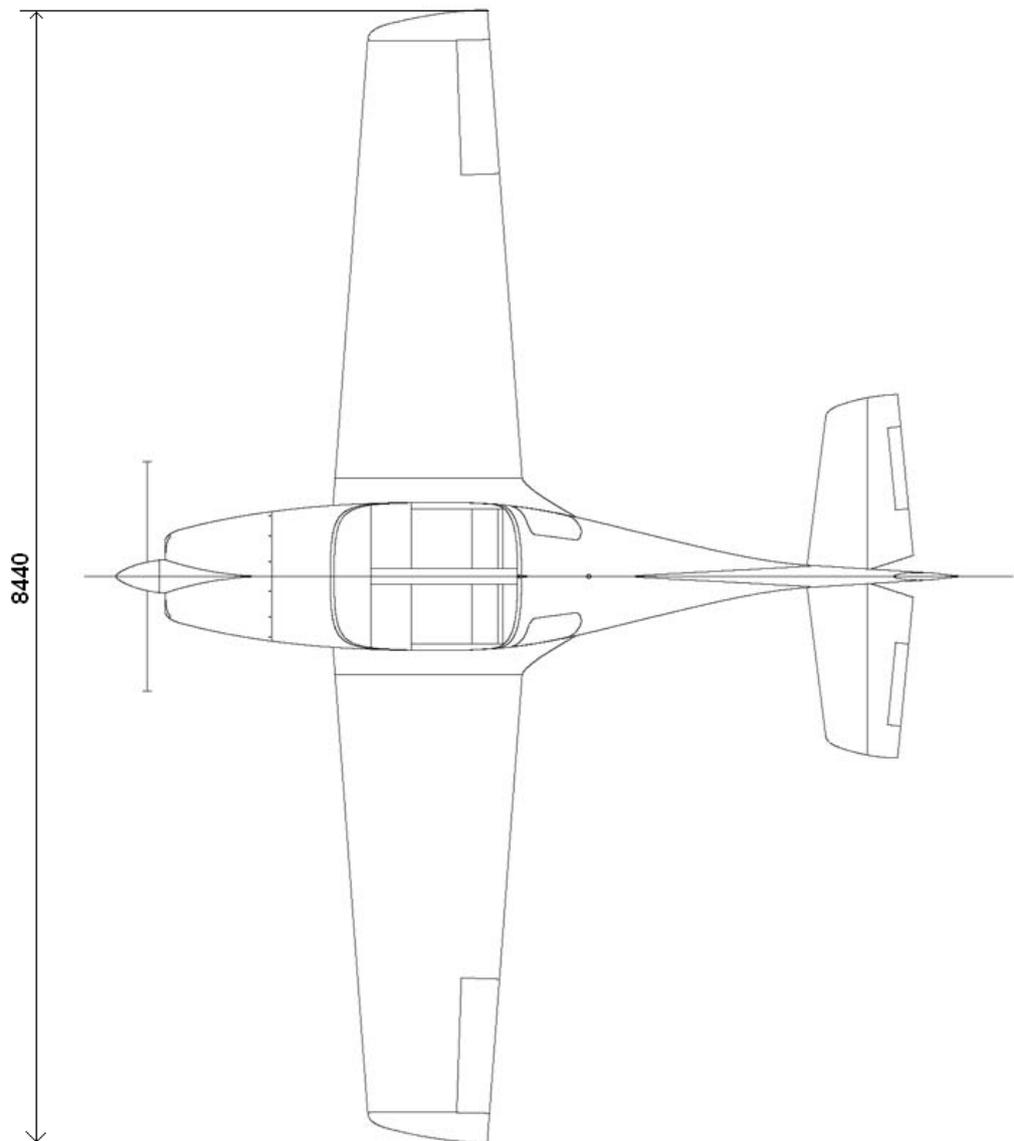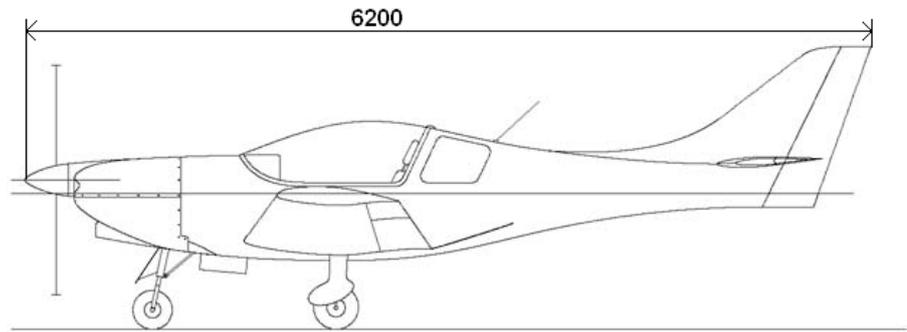

VL-3E-1 Pilot Operating Handbook

2. Limitations

2.1 Introduction

Section 2 includes Operating limitations, instrument markings, and basic placards necessary for safe operation of the aeroplane, its engine, standard systems and standard equipment.

2.2 Airspeed limits

Airspeed limitations and their operational significance are shown below:

Airspeed		IAS [km/h]	Remarks
V_{NE}	Never exceed speed	305	Do not exceed this speed in any operation.
V_A	Manoeuvring speed	165	Do not make full or abrupt control movement above this speed, because under certain conditions the aircraft may be overstressed by full control movement.
V_{NO}	Maximum structural cruising speed	225	Do not exceed this speed except in smooth air, and then only with caution.
V_{FE}	Maximum flap extension speed	120	Do not exceed this speed with flaps extended
V_{LE}	Maximum landing gear extension speed	150	Do not exceed this speed with undercarriage extended

2.3 Airspeed indicator markings

Airspeed indicator markings and their colour-code significance are shown below:

Marking	Range or value [IAS km/h]	Significance
White arc	55 - 120	Positive Flap Operating Range
Green arc	75 - 225	Normal Operating Range
Yellow arc	225 - 305	Manoeuvres must be conducted with caution and only in smooth air.
Red line	305	Maximum speed for all operations.

VL-3E-1 Pilot Operating Handbook

2.4 Powerplant

Engine Manufacturer : Bombardier-Rotax GMBH

Engine Model : Rotax 912 ULS

Power :

Max. Take – off : 73.5 kW / 100 hp

Max. Continuous : 69 kW / 95 hp in 5500 rpm

Cruising : 66 kW / 90 hp in 4800 rpm

Engine RPM :

Max. Take-off : 5800 RPM max 5 min

Max. Continuous : 5500 RPM

Cruising : 4800 RPM

Idling : 1400 RPM

Cylinder head temperature :

Minimum : 60 °C

Maximum : 120 °C

Oil temperature :

Minimum : 50 °C

Maximum : 130 °C

Operating : 90 °C – 100 °C

Fuel pressure (if the fuel gauge and sensor are installed):

Minimum : 0,15 bar

Maximum : 0,40 bar

Fuel : see chapter 2.13

Oil : (refer to engine Operator's Manual).

VL-3E-1 Pilot Operating Handbook

2.5 Engine instrument markings

Function	Minimum Limit	Normal Operating Range	Caution Range	Maximum Range
Engine speed (RPM)	1400	1400-5500	5500-5800	5800
Cylinder Head Temperature (CHT) [°C]	74	74-110	100-110	120
Oil Temperature [°C]	50	88-110	110-130	130
Oil Pressure [bar]	2,0	2,0 – 5,0	5,0 – 7,0	7,0 cold engine starting

2.6 Miscellaneous instrument marking

Fuel Level Indication

Used floater fuel indication system does not allow to indicate exact fuel level in whole range (the floater contacts the upper wall of the tank before the tanks is filled full). From this reason the following states of fuel in the tanks are recognised:

	Left tank		Right tank	
	Liter	US gallon	Liter	US gallon
Full tank	59	15.6	59	15.6
Upper indicating limit	40	10.5	40	10.5

The following colour ranges are marked in EMS diagrams for both tanks:

	minimum		maximum	
	Liter	US gallon	Liter	US gallon
Green range	16	4.2	maximum	
Yellow range	8	2.1	16	4.2
Red range	0	0	8	2.1

VL-3E-1 Pilot Operating Handbook

2.7 Weight

Empty weight (standard equipment)	
Max. take-off weight	472.5 kg
Max landing weight	472.5 kg
Max. baggage weight	15 kg

2.8 Centre of gravity


Empty aeroplane C.G. position (undercarriage retracted).....	
Empty aeroplane C.G. position (undercarriage extended).....	
Operating C.G. range	21 - 34 %MAC

2.9 Approved manoeuvres

Aeroplane Category: NORMAL
The aeroplane is approved for Normal and Manoeuvres listed below:

- Steep turn not exceeding 60° bank

2.10 Manoeuvring load factors

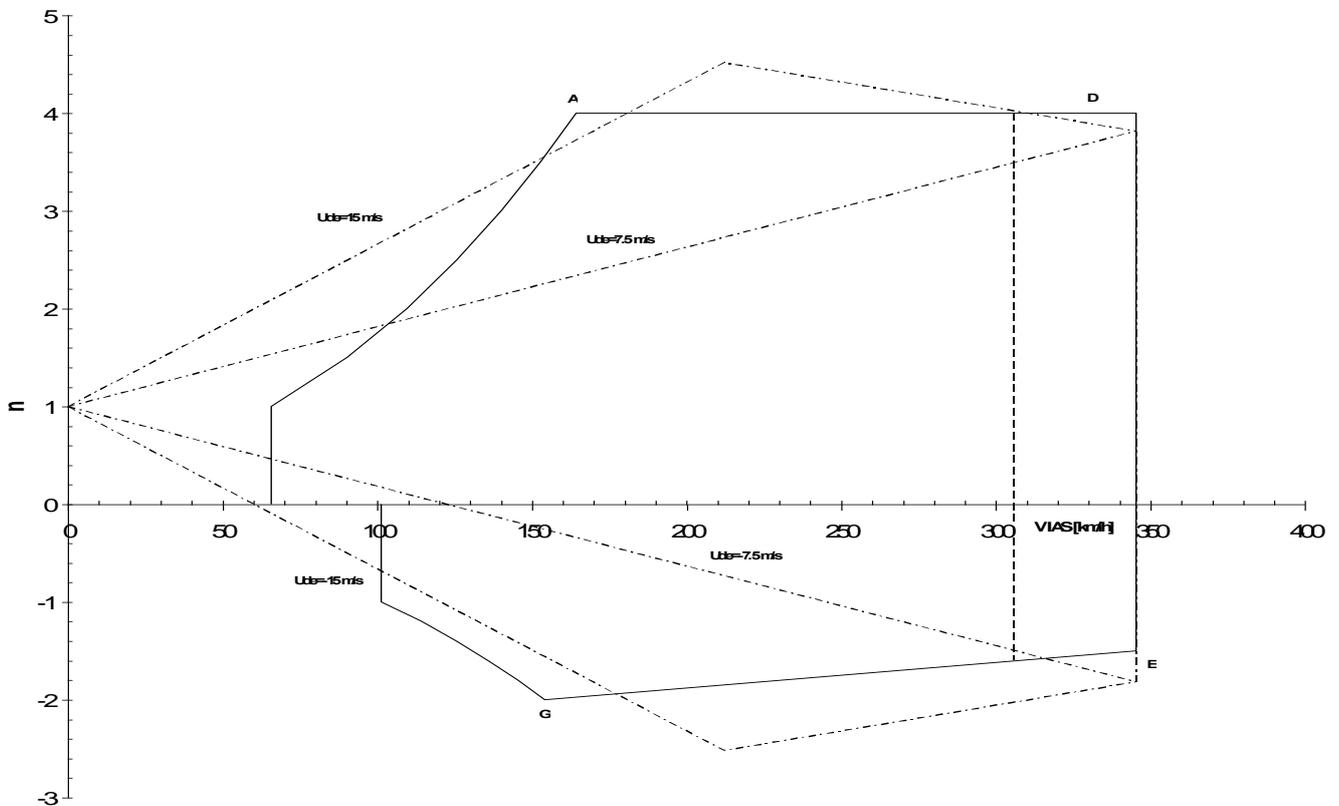

VL-3E-1 Pilot Operating Handbook

2.11 Crew

Numer of seats.....	2
minimum crew weight	65 kg
maximum crew weight	see. 6.2

2.12 Kinds of operation

Day VFR flights only.

Instruments and equipment for VFR flights:

- 1 Airspeed indicator (marked according to 2.3)
- 1 Altimeter
- 1 Vertical speed indicator
- 1 Compass
- 2 Safety harnesses

2.13 Fuel

- Automotive premium grade gasoline, leaded, according to DIN 51600,Ö-NORM C 1103
- EUROSUPER RON 95 unleaded accord. to DIN 51607,Ö-NORM 1100
- AVGAS 100 LL
- Due to higher lead content in AVGAS, the wear of valve seats and deposits in the combustion chamber will increase. Therefore, use AVGAS only if other fuel types are not available.
- BA 95 Natural is recommended for Czech Republic

For other suitable fuel types refer to the engine Operator's Manual

2.14 Other limitations

- No smoking aboard the aeroplane.

VL-3E-1 Pilot Operating Handbook

2.15 Limitation placards

Caution
The owner (aeroplane operating agency) of
this aeroplane is responsible for placards readability
during aeroplane service life.

EMPTY WEIGHT	... KG
MAX. TAKE-OFF WEIGHT	472 KG
MIN. CREW WEIGHT	65 KG
MAX. BAGGAGE WEIGHT	15 KG

NEVER EXCEED SPEED	VNE= 305 KM/H
MANOEURING SPEED	VA =165 KM/H
DESIGN CRUISING SPEED	VC =235KM/H
MAX. LANDING GEAR EXTENSION SPEED	VLE =150 KM/H
MAX. FLAP EXTENSION SPEED	VFE =120 KM/H
STALL SPEED	VS0 = 55 KM/H

Power	RPM	manifold pressure
	[1/min]	[in Hg]
Take-off	5800	27.5
continuing	5500	27
75%	5000	26
65%	4800	26
55%	4300	24

VL-3E-1 Pilot Operating Handbook

3. Emergency procedures

3.1 Introduction

Section 3 provides checklist and amplified procedures for coping with emergencies that may occur. Emergencies caused by aeroplane or engine malfunctions are extremely rare if proper pre-flight inspections and maintenance are practised. However, should an emergency arise, the basic guidelines described in this section should be considered and applied as necessary to correct the problem.

3.2 Engine failure

3.2.1 Engine failure during take-off run

1. Throttle - retard to idle
2. Ignition - off

3.2.2 Engine failure immediately after take-off

1. Speed - gliding at 100km/h (55 kts)
2. Altitude - below 50 m (165 ft) : land in take-off direction
- over 50 m (165 ft) : choose landing area
3. Wind - evaluate direction and velocity
4. Landing area - choose free area without obstacles,into wind
5. Flaps - extend as needed
6. Fuel valve - off
7. Ignition - off
8. Safety harness - tighten
9. Master switch - switch off before landing
10. Land

3.2.3 Engine failure in flight (Forced landing)

1. Speed - gliding at 100km/h (55 kts)
2. Altitude - below 50 m (165 ft) : land in take-off direction
- over 50 m (165 ft) : choose landing area
3. Wind - evaluate direction and velocity
4. Landing area - choose free area without obstacles
5. Flaps - extend as needed
6. Fuel valve - off
7. Ignition - off
8. Safety harness - tighten
9. Master switch - off before landing
10. Land

3.2.4 In-flight engine start

1. Speed - gliding at 120km/h (65 kts)
2. Altitude - check
3. Landing area - choose according to altitude (safest area)
4. Master switch - on
5. Fuel valve - open
6. Choke - as necessary (for cold engine)
7. Throttle - for 1/3 power
8. Ignition - on
9. Starter - turn switch box key

VL-3E-1 Pilot Operating Handbook

3.3 Smoke and fire

3.3.1 Fire on ground

1. Fuel valve - off
2. Throttle - close
3. Master switch - off
4. Ignition - off
5. Abandon the aeroplane
6. Extinguish fire if possible or call fire department.

3.3.2 Fire during take-off

1. Fuel valve - off
2. Throttle - full
3. Speed - 120 km/h (65 kts)
4. Master switch - off
5. Ignition - off
6. Land and brake
7. Abandon the aeroplane
8. Extinguish fire if possible or call fire department.

3.3.3 Fire in flight

1. Fuel valve - off
2. Throttle - full
3. Ignition - off after using up fuel in carburetors and engine stopping
4. Master switch - off
5. Choose of area - heading to the nearest airport or choose emergency landing area
6. Emerg. landing - perform according to par.3.6.1
7. Abandon the aeroplane
8. Extinguish fire if possible or call fire department.

3.4 Glide

Gliding may be used in case of engine failure.

1. Speed - ~ 100 km/h (55 kts)
2. Flaps - retracted
3. Instruments - within permitted limits

VL-3E-1 Pilot Operating Handbook

3.5 Landing emergencies

3.5.1 Emergency landing

An emergency landing may be carried out due to engine failure and when the engine cannot be restarted.

1. Speed - 100 km/h (55 kts)
2. Trim - trim the aeroplane
3. Safety harness - tighten
4. Landing gear - go to the open position - see 4.3.8.
If landing gear can not be extended, or field is not acceptable for landing with open landing gear, do not extend the landing gear!
5. Flaps - as needed
6. COMM - if installed - report your location if it is possible
7. Transponder - if installed - if necessary set transponder to 7700 (ICAO worldwide emergency code)
8. Fuel valve - off
9. Ignition - off
10. Master switch - off

3.5.2 Precautionary landing

A precautionary landing may be carried out due to low fuel and/or bad weather conditions.

1. Choose landing area, determine wind direction
2. If a COMM is installed - report your plan to land and land area location to nearest ATC
3. Perform low-altitude passage into wind over the right-hand side of the chosen area with flaps extended to the take-off position at a speed of 60 kts to thoroughly inspect the area
4. Perform flight around the chosen area
5. Landing gear go to the down position - see 4.3.8.
If landing gear can not be extended, or field is not acceptable for landing with open landing gear, do not extend the landing gear!
6. Perform an approach at increased idling with fully extended flaps
7. Reduce power to idle when over the runway threshold and touch-down at the very beginning of the chosen area
8. After stopping the aeroplane switch off all switches, shut off the fuel valve, lock the aeroplane and look for a help

3.5.3 Landing with a flat tire

1. Approach - normal
2. Touch down - good tire first, keep the damaged wheel above ground as long as possible using ailerons
3. Maintain the direction at landing run, applying braking control

3.5.4 Landing with a defective landing gear

1. If the main landing gear is damaged, perform touch-down at the lowest speed possible and maintain direction during landing run, if possible.
2. If the nose wheel is damaged perform touch-down at the lowest speed possible and hold the nose wheel off the runway by means of the elevator control as long as it is possible

3.5.5 Landing with landing gear in retracted position

1. Approach - normal
2. Touch down - touch down with minimum speed.

VL-3E-1 Pilot Operating Handbook

3.5.6 Landing gear emergency extension



Landing gear controller:

- (1) - „Reset“ button
- (2) - Three red lights for „GEAR UP“ position
- (3) - Three green lights for „GEAR DOWN“ position
- (4) - Red light „AGREGAT“
- (5) - Switch for retraction and extension of landing gears

This procedure is necessary to use if you don't see the three green lights on the „Landing gear controller“ during the landing gears extension. The hydraulic system for landing gears opening is programmed to run 30 sec. If after this period the „Landing gear controller“ don't indicate all three landing gear sensors in the right position, the red light „agregat“ (4) start flashing and the system will set himself into „standby status“. In this case push once again the button „Reset“ (1) on the „Landing gear controller“ and the system will start new cycle of landing gears opening. If the three green lights appears, landing gears are open and in the right position. After landing of aeroplane is necessary make detail inspection of undercarriage opening system and find a cause of the defect!

If after reset of „Landing gear controller“ you don't see the three green lights you must use the hand pump for „Emergency release of gears“ (see chapter 7.3 pos.22) for manuel opening of landing gears – follow next steps:

1. Check fuel level - for estimating the time, you have for an emergency landing
2. Airspeed 120 km/h (65 kts)
3. Switch (5) of „Landing gear controller“ toggle to position „gear down“
4. Landing flaps open to „15°“
5. By the right hand, hold the control stick to fly the plane and by the left hand to grab the handle of hand pump.
6. By pulling pump handle up, tear off safety wire!
7. Start pumping down untill the hand pump stops (min.35 cycles of compression) and until the three green lights appears on „Landing gear controller“ - it indicate, that landing gears are open and in the right position.
8. When appears three green lights on the „Landing gear controller“ you can safely land.
9. If THREE green lights will not appears, ask air traffic control tower for visual inspection of landing gears position. If the air traffic control tower confirm you right position of all three open landing gears you can safely land.
10. If the air traffic control tower does not confirm you right position of all three landing gears, is the best solution retract all wheels and make emergency landing without landing gears.

VL-3E-1 Pilot Operating Handbook

3.6 Recovery from unintentional spin

There is no tendency of spontaneous uncontrollable spin entry if normal pilot techniques are used. Should an inadvertent spin occur, the following recovery procedure should be used:

1. Throttle - retard to idle
2. Control stick - hold ailerons neutralized
3. Rudder pedals - apply full opposite rudder
4. Control stick - forward elevator control as required to break the spin
5. Rudder pedals - immediately after the stopping of a rotation neutralise the rudder
6. Recover from dive

3.7 Other emergencies

3.7.1 Vibration

If vibrations appears:

1. Set aeroplane speed and engine speed to power setting where the vibrations are the lowest.
2. Land at the nearest airfield or perform a precautionary landing according to 3.5.2

3.7.2 Carburettor icing

Carburettor icing mostly occurs when getting into an area of ice formation. The carburettor icing shows itself through a decrease in engine power and an increase of engine temperatures.

To recover the engine power, the following procedure is recommended:

1. Speed - 110km/h (60 kts)
2. Throttle - set for 1/3 power
3. If possible, leave the icing area
4. Gradually increase the engine power to cruise condition after 1-2 minutes.

If you fail to recover the engine power, land at the nearest airfield (if possible) or depending on circumstance, execute a precautionary landing according to 3.6.2

3.7.3 Alternator or power supply failure

1. Switch off immediately all electric instruments which are not important for flight.
2. Check voltage of the battery and to land soonest on the nearest airport!

3.7.4 Cabin opening in flight

1. Reduce speed - to 100 km/h (55 kts)
2. Landing flaps - on „15°“
3. Trim the plane
4. Close cabin again and resume flight if no damage is observed.
5. Control cabin frame and lock before next flight.

3.7.5 Tranceiver communication failure

In the case of radio communication failure follow next steps:

1. Check power supply - status of fuse.
2. Check communication with another ATC.
3. In the case of no communication set tranceiver to 7600 (ICAO worldwide emergency code) to inform ATC, that your tranceiver is out of order.
4. To land soonest on the nearest airport!

VL-3E-1 Pilot Operating Handbook


4. Normal procedures

4.1 Introduction

Section 4 provides checklist and amplified procedures for the conduct of normal operation.

4.2 Pre-flight inspection

The pre-flight inspection is very important because an incomplete or careless inspection could allow aeroplane failure. The following pre-flight inspection procedure is recommended by the aeroplane manufacturer:

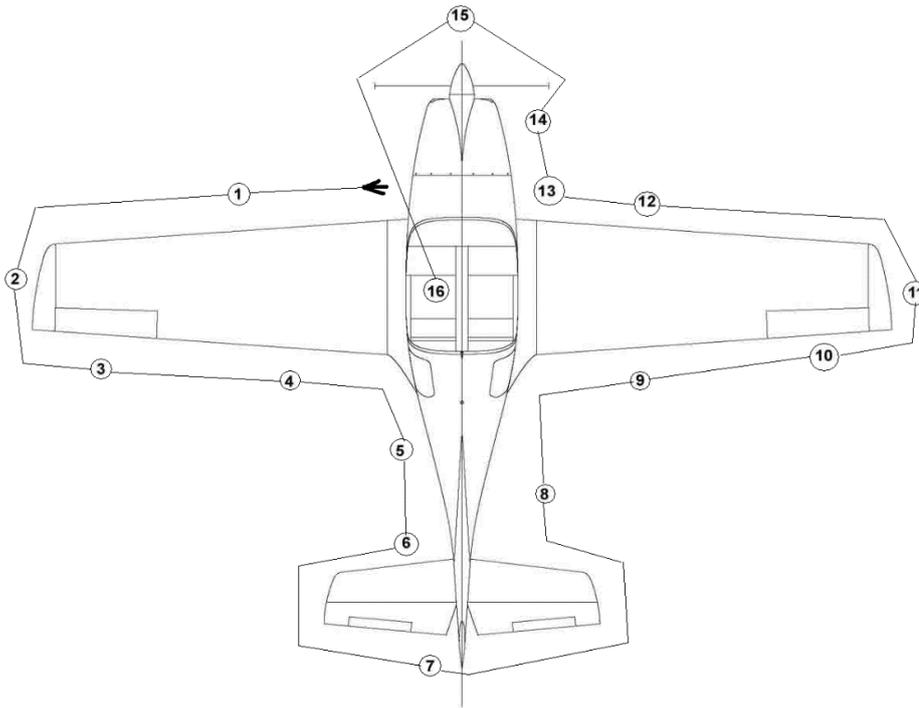

⇒ Before pre-flight inspection check in the cockpit if ignition box is switched-off!

1. Wing
 - Wing surface condition
 - Leading edge condition
 - check if the flap and aileron controls are correctly connected
 - pitot-static tube condition
2. Wing tips
 - Surface condition
 - Check of tips attachment
 - Condition and attachment of position lights (if installed)
3. Aileron
 - Surface and controls condition
 - Attachment
 - Play
4. Flap
 - Surface and controls condition
 - Attachment
 - Play

VL-3E-1 Pilot Operating Handbook

5. Fuselage rear
 - Surface condition
6. Vertical tail unit
 - Surface and controls condition
 - Play
 - Free movement
7. Horizontal tail units
 - Surface and controls condition
 - Attachment
 - Play
 - Free movement
 - check if the elevator control is correctly connected
8. see item 5.
9. see item 4.
10. see item 3.
11. see item 2.
12. see item 1.
13. Landing gear
 - Check of main and nose landing gear attachment
 - Nose wheel steering
 - Condition and inflation of tires
 - Condition and attachment of wheel fairings
 - Condition and attachment of hydraulic parts and undercarriage mechanisms
14. Engine
 - Engine cowlings condition
 - Engine mount condition
 - Engine attachment check
 - Oil quantity check (after 1 minute engine run)
 - Fuel and Electrical system visual check
 - Hydraulic system - visual check quantity of hydraulic fluid
 - Fuel system - draining
15. Propeller
 - Propeller attachment
 - Blades, Hub, Spinner condition
16. Cockpit
 - Ignition box - off and key pull out
 - Master switch - off
 - Instruments - check of condition
 - Fuel gauge - check fuel quantity (for check of fuel quantity switch-on Master switch and Avionic master switch, if aeroplane is equipped by „glass cockpit“, then both master switches turn-off!)
 - Controls
 - visual check
 - check for proper function
 - check of plays
 - check of flaps extension
 - check of free movement up to the stops
 - Check for loose items - secure papers
 - Canopy - condition of attachment, cleanliness

VL-3E-1 Pilot Operating Handbook

4.3 Normal procedures

4.3.1 Before entering cockpit

1. Aeroplane surface - check of covers and caps
2. Cockpit - items inside the cockpit
3. Ignition - off
4. Master switch - off

4.3.2 After entering cockpit

1. Rudder control - free movement check
2. Brakes - check of function
3. Hand control - free movement check
4. Trim - check control movement
5. Flaps - check of function
6. Undercarriage - down
7. Engine controls - throttle and choke lever movement
8. Fuel valve - off
9. Fuel gauge - fuel quantity check
10. Switch box - off
11. Circuit breakers - off
12. Ignition - off
13. Instruments, COMM- condition check
14. Safety harness - check of integrity and attachment
15. Cockpit - condition and canopy lock function

4.3.3 Before engine starting and starting of engine

1. Fuel valve - on
2. Switch box - turn the key
3. Circuit breakers - on
4. Propeller - minimum propeller pitch
5. Throttle - set for idling
6. Choke - according to engine temperature
7. Control stick - fully pulled
8. Check free area - clear
9. Master switch - on
10. Ignition box - on (both circuit) by turning the key in two steps to the right
11. Brakes - fully applied
12. Start - by turning the key to the right, until the engine start and then release pressure on the key
13. After starting - set throttle to idling
14. Oil pressure - within 10 sec. min. pressure
15. Choke - off
16. Engine warm - according to 4.3.4

Caution

The starter should be activated for max.10 sec., then 2 min. pause for engine cooling.
After engine starting adjust the throttle for smooth running at 1 500 rpm. Check oil pressure which should increase within 10 sec. Increase engine speed after oil pressure reaches 2 bars and is steady.
Only one magneto should be switched on (off) during ignition magneto check.

VL-3E-1 Pilot Operating Handbook

4.3.4 Engine warm up, engine check

1. Lock the main wheels by means of wheel chocks before engine check. Refer to the Engine Manual for warming.
2. Set max. power.
3. Check acceleration from idling to max. power. If necessary cool the engine prior to its shutdown.

Caution

Engine check should be performed with the aeroplane pointing upwind and not on loose terrain (the propeller will pick up debris which can damage the propeller).

4.3.5 Taxiing

The maximum recommended taxiing speed is 15km/h (8 kts). The direction of taxiing can be controlled by the steer able nose wheel and rudder or by brakes.

4.3.6 Before take-off quick and friendly cooperation

1. Brakes - fully applied
2. Rudder control - check of free movement
3. Hand control - check of free movement
4. Trim - neutral position
5. Undercarriage - three green lights, switch „down“ position
6. Propeller - minimum propeller pitch
7. Flaps - "15°" position
8. Engine controls - choke off
9. Fuel valve - open
10. Fuel gauge - fuel quantity check
11. Circuit breakers - on
12. Instruments, COMM- within limits, frequency set
13. Safety harness - secured and tightened
14. Cockpit - canopy condition, lock take-off
15. Gradually increase the throttle (max. power) to set the aeroplane into motion.

The direction of take-off run can be controlled by steer able nose wheel and rudder. Slightly pull the stick to lift the nose wheel. The aeroplane takes-off at a speed above 70km/h (38 kts), then slightly push forward the stick to reach climb speed of 110 km/h (60 kts). Refer to the par. 5.2.5 for optimum climb speed. Max. flaps extended speed is 120 km/h (65 kts).

Warning

The take-off is prohibited if:

- the engine run is unsteady
- the engine instruments values are beyond operating limits
- the engine choke is on
- the crosswind velocity exceed permitted limits 5.3.2
- three green lights on Landing gear controller don't shine, switch is in "gear up" position or red light „agregat“ is shining

VL-3E-1 Pilot Operating Handbook


4.3.7 Climb

1. Throttle - Max. Continuous Power
2. Speed - 120 km/h (65 kts)
3. Trim - adjust as needed to reduce stick pressure
4. Landing gear - up see 4.3.8. Max. speed for open landing gear is 150 km/h (80 kts)
5. Instruments - CHT, Oil temp. and pressure within limits.

Caution

If cylinder head or oil temperature exceed limits, reduce the angle of climb to increase airspeed and allow better cooling.

4.3.8 Retraction and extension of the landing gear

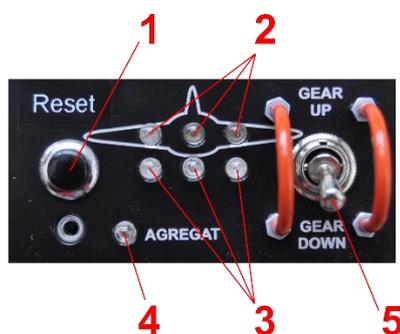

Landing gear controller:

- (1) „Reset“ button
- (2) Three red lights for „gear up“ position
- (3) Three green lights for „gear down“ position
- (4) Red light „agregat“
- (5) Switch for retraction and extension of landing gears

For retraction and extension of the landing gears follow next steps:

1. Airspeed max. 150 km/h (80 kts)
2. Toggle switch (5) of „Landing gear controller“ to required position (gear up – gear down). Red light „agregat“ (4) start shining and hydraulic power unit start to extends or retracts landing gears.
3. If the three red lights (2)/three green lights (3) appears on the „Landing gear controller“, landing gears reached the required end position – retracted/extended.

To avoid landing with retracted landing gears, are landing flaps connected with landing gears. If the landing gears are closed and pilot open landing flaps, three red lights on „Landing gear controller“ start flashing and sound alarm turns on. After toggle „switch“ (5) to position „gear down“ sound alarm turns off and landing gears are going to „down“ position – three red lights are still flashing! When landing gears reached the required end position, on the „Landing gear controller“ appears three green lights.

For turning off alarm during flight with open landing flaps push the button „Reset“ (1).

If is not possible extend landing gears by this normal procedure use emergency procedure - see chapter 3.5.6. Landing gear emergency extension

VL-3E-1 Pilot Operating Handbook

4.3.9 Cruise

The aeroplane flight characteristics are very forgiving within permitted limits of airspeeds, configurations and C/G range. The aeroplane can be controlled very easily. Refer to the Section 5 par. 5.3.1.

4.3.10 Descent

1. Throttle - idling
2. Speed - 140 km/h (75 kts)
3. Trim - as necessary to reduce stick pressure
4. Instruments - within limits

Caution

When on long final or descending from a very high altitude, it is not advisable to reduce the engine Throttle control lever to idle. The engine becomes overcooled and a loss of power occurs. When descending, apply increased idle so that engine instrument readings stay within the limits for normal use.

4.3.11 Check before landing

1. Fuel - fuel quantity check
2. Safety harness - tightened
3. Undercarriage - open - see 4.3.8. max.speed for open undercarriage is 150 km/h (80 kts)
4. Propeller - minimum propeller pitch
5. Brakes - check function
6. Trim - adjust as required
7. Landing area check - runway
8. Base leg

4.3.12 On base leg

1. Speed - 110 km/h (60 kts)
2. Flaps - extend to "38°" position
3. Trim - adjust as required
4. Throttle - as necessary
5. Instruments - within limits

4.3.13 On final

1. Speed - 90 - 100 km/h (50 - 55 kts)
2. Flaps - "55°" position
3. Trim - adjust as required
4. Throttle - as necessary
5. Instruments - within limits

4.3.14 Landing

The airspeed during final is slowly reduced, so that the touch down speed is about 57 km/h (35 kts). Gradually pull the stick after touch down to hold the nose wheel up as long as possible. Push the control stick forward when the nose wheel touches. The landing run can be shortened by braking.

VL-3E-1 Pilot Operating Handbook

4.3.15 Balked landing or „go around“

1. Throttle - full
2. Engine speed - 5700 rpm
3. Flaps - set at the "15°" position at a speed of 90 km/h (50 kts)
4. Trim - as necessary
5. Flaps - retract at a height of 50 m (165 ft)
6. Trim - as necessary
7. Engine speed - maximal continuous power
8. Instruments - within limits
9. Climb - at 120 km/h (65 kts)
10. Landing gear - go to the up position

4.3.16 After landing

1. Engine speed - set as necessary for taxiing
2. Flaps - retracted and locked
3. Trim - neutral position

4.3.17 Engine shut-down

1. Engine speed - idling
2. Instruments - engine instruments within limits
3. COMM + intercom- off
4. Ignition - off
5. Circuit breakers- off
6. Avionic master switch - off
7. Ignition box - turn the key to switch off
8. Fuel valve - off

4.3.18 Flight in rain

When flying in the rain, no additional steps are required. Aeroplane qualities and performance are not substantially changed

VL-3E-1 Pilot Operating Handbook

5. Performance

5.1 Introduction

Section 5 provides approved data for airspeed calibration, stall speeds and take-off performance and additional information.

The data in the charts has been computed from actual flight tests with the aeroplane and engine in good condition and using average piloting techniques.

If not stated otherwise the performance data given in this section is valid for max. takeoff weight and under International Standard Atmosphere (ISA) conditions

5.2 Performance

5.2.1 Airspeed indicator system calibration

IAS	EAS	IAS	EAS
[km/h]	[km/h]	[kts]	[kts]
57	65	31	35
70	78	38	42
80	87	43	47
100	108	54	58
120	125	65	67
140	142	76	77
160	160	86	86
180	179	97	96
200	198	108	107
220	218	119	118
240	238	130	128
260	258	140	139
280	278	151	150
300	297	162	160
305	302	165	163

VL-3E-1 Pilot Operating Handbook

5.2.2 Stall speeds

Stall	Flaps position	Engine Power	Stalling Speed	
			IAS [km/h]	CAS [km/h]
Wing level stall	RETRACTED	idling	75	82
	"TAKE-OFF"	idling	65	73
	"LANDING"	idling	55	65

5.2.3 Take-off performance

Take-off distances stated in the following table are valid at sea level.

	Take-off run distance [m]	Take-off distance over 15 m obstacle [m]
Grass	150	280

5.2.4 Landing

Landing distances stated in the following table are valid at sea level.

	Landing distance over 15 m obstacle [m]	Landing run distance (full braking) [m]
Grass	270	100

5.2.5 Climb performance

Best Rate-of-climb speed is 140 km/h (75 kts) IAS, corresponding rate of climb is 6,5m/s (12 kts).

VL-3E-1 Pilot Operating Handbook


5.3 Additional information

5.3.1 Cruise

Regime	Economy Cruise	Max. Continuous Power	Max. Take-Off Power
Time limitation	unlimited	unlimited	max. 5 min.
Engine speed	4300	5500	5800
Manifold pressure [inHg]	24	27	27.5
IAS [km/h]	210	260	280

5.3.2 Demonstrated crosswind performance

Max. permitted cross wind velocity for take-off and landing 5 m/s (10 kts)
Max. permitted head wind velocity for take-off and landing 8 m/s (15 kts)

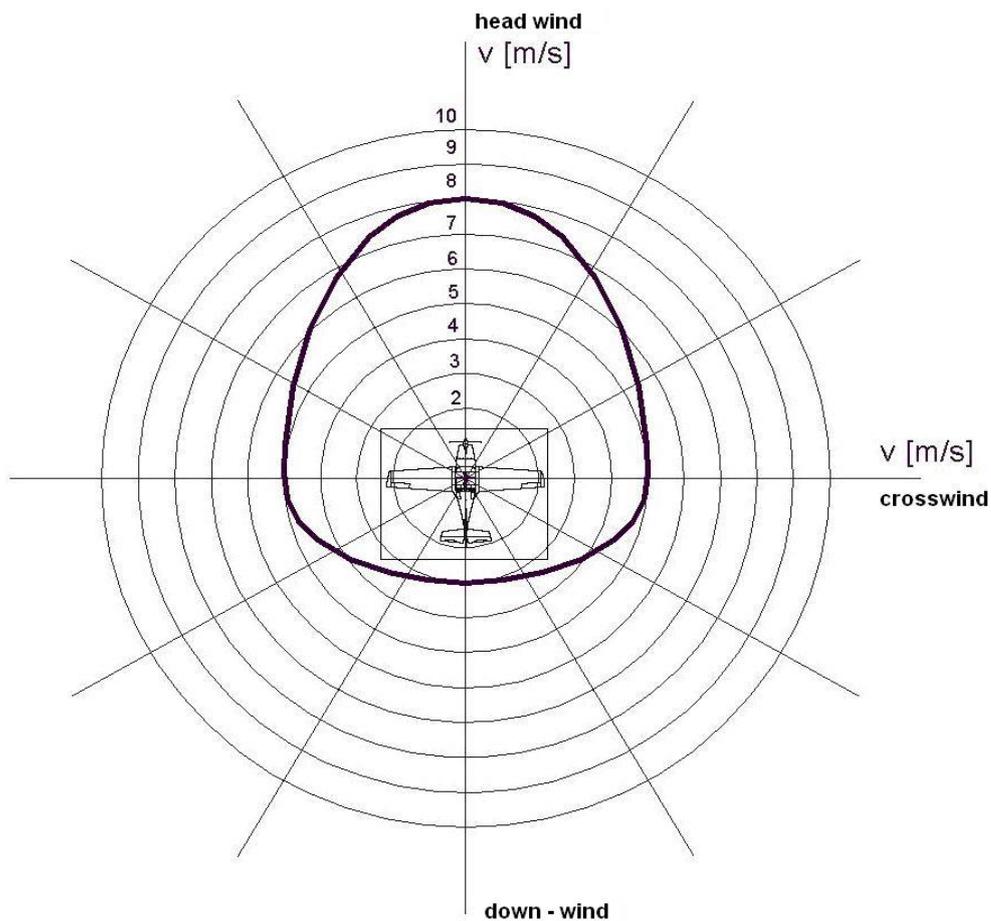

VL-3E-1 Pilot Operating Handbook

6. Weight and balance

6.1 Introduction

This sections contains the payload range within which the VL-3 Evolution aeroplane may be safely operated. Procedure of weighting the empty aeroplane is shown in the VL-3 Maintenance Manual - chapter 1.5 Aeroplane empty weight and centre of gravity.

6.2 Permitted payload range

6.2.1 Weight limitations

Maximum take-off weight 472.5 kg

Operating C.G. range 21 - 34 % M.A.C

6.2.2 CG calculation

Empty weight (see 2.7)	m_{pr} [kg]
Pilot weight	m_{p1} [kg]
Copilot weight	m_{p2} [kg]
Fuel quantity	vp [litr]
Baggage weight	m_z [kg]
C.G. of empty aeroplane (see 2.8)	x_{bsat} [%]
Wing leading edge position	$x_{NH} = 540$ mm
M.A.C. displacement	$x_{SAT} = 68$ mm
M.A.C.	$b_{SAT} = 1236$ mm

Weight $m = m_{pr} + m_{p1} + m_{p2} + vp \cdot 0,725 + m_z$

C.G. position

$$x = \frac{m_{pr} \cdot \left(\frac{x_{bsat} \cdot b_{sat}}{100} \right) + m_{p1} \cdot 682 + m_{p2} \cdot 682 + vp \cdot 0.725 \cdot 215 + m_z \cdot 1467}{m}$$

$$xt = \frac{x}{b_{SAT}} \times 100$$

Example

Empty weight	$m_{pr} = 301$ kg
Pilot weight	$m_{p1} = 100$ kg
Copilot weight	$m_{p2} = 0$ kg
Fuel quantity	$vp = 45$ litres
Baggage weight	$m_z = 10$ kg
C.G. of empty aeroplane	$x_{bsat} = 17.1$ % M.A.C

Take off Weight

$$m = m_{pr} + m_{p1} + m_{p2} + vp \cdot 0,725 + m_z = 301 + 100 + 0 + 45 \cdot 0,725 + 10 = 443,6 \text{ kg}$$

VL-3E-1 Pilot Operating Handbook

C.G. position

$$x = \frac{m_{pr} \cdot \left(\frac{x_{bsat} \cdot b_{sat}}{100} \right) + m_{p1} \cdot 682 + m_{p2} \cdot 682 + vp \cdot 0.725 \cdot 215 + m_z \cdot 1467}{m}$$

$$x = \frac{301 \cdot \left(\frac{17.1 \cdot 1236}{100} \right) + 100 \cdot 682 + 0 \cdot 682 + 45 \cdot 0.725 \cdot 215 + 10 \cdot 1467}{443.6} = 346mm$$

$$xt = \frac{x}{b_{SAT}} \times 100 = \frac{346}{1236} \times 100 = 28\% b_{SAT}$$

Warning

If C.G. position and take-off weight are not in operating range (see 6.2.1.) Do not fly !

The Center of the Gravity must be inside operating range (see 6.2.1.) during the whole flight!

VL-3E-1 Pilot Operating Handbook

7. Aeroplane and Systems Description

7.1 Introduction

This section provides description and operation of the aeroplane and its system.
Refer to Section 9, Supplements, for details of optional systems and equipment.

7.2 Airframe

VL-3 Evolution airframe is all-carbonfibre monocoque construction.
For more information see VL-3 aeroplane Maintenance Manual.

7.2.1 Fuselage

All composite sandwich construction.
For more information see VL-3 aeroplane Maintenance Manual.

7.2.2 Wing


The composite wing has one main spar with carbon flanges, no ribs; the stressed skin is of sandwich construction with a foam core. For more information see VL-3 aeroplane Maintenance Manual.

7.2.3 Horizontal Tail Unit

Horizontal tail units have same construction like wing.
For more information see VL-3 aeroplane Maintenance Manual.

VL-3E-1 Pilot Operating Handbook

7.3 Instrument panels and controls in the cockpit

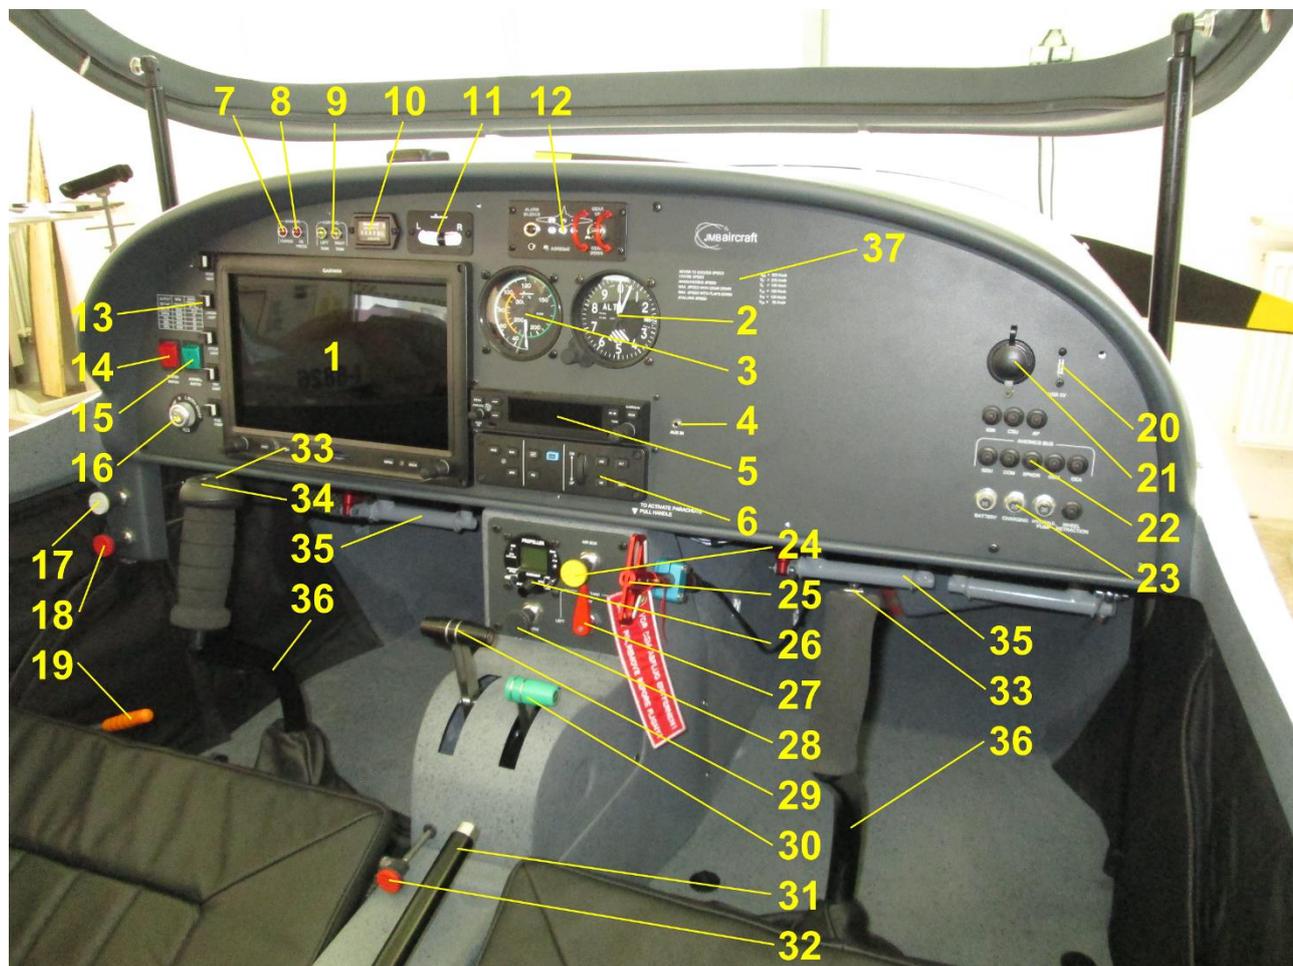

- | | | | | | |
|----|----------------------------|----|---------------------------|----|-----------------------|
| 1 | Efis – Garmin GDU 460 | 15 | Avionic master switch | 29 | Throttle control |
| 2 | Altimeter | 16 | Ignition box | 30 | Trim lever |
| 3 | Airspeed indicator | 17 | Ventilation control | 31 | Flaps lever |
| 4 | AUX IN conector | 18 | Heating control | 32 | Parking brake control |
| 5 | Tranceiver | 19 | Emergency relace of gears | 33 | PTT switch |
| 6 | Garmin GMC 305 | 20 | 5V USB socket | 34 | Autopilot disc switch |
| 7 | Batery charge indicator | 21 | 12V socket | 35 | Rudder pedals |
| 8 | Low oil pressure indicator | 22 | Circuit breaker | 36 | Control stick |
| 9 | Low fuel indicator | 23 | Fuses | 37 | Airspeed limits |
| 10 | Hobbs – engine run hours | 24 | Airbox control | | |
| 11 | Turn and bank indicator | 25 | Parachute rescue system | | |
| 12 | Landing gear controler | 26 | Control speed unit | | |
| 13 | Switches | 27 | Fuel tank selector | | |
| 14 | Master switch | 28 | Choke control | | |

VL-3E-1 Pilot Operating Handbook

7.4 Landing gear

The aeroplane has a tricycle retractable landing gear with a nose wheel. The main fibreglass legs, main wheel size 350x100, hydraulically operated brakes. The steerable nose wheel of 300 x 100 size has a shock absorber and is controlled by the rudder pedals.

Recommended pressure for BERINGER wheels:

- main wheels **3,0+-0,3 bars (44 psi)**
- nose wheel **2,5+-0,3 bars (36 psi)**

7.5 Seats and Safety harness

The seats and back rests are formed by a composite skeleton covered with upholstery. Four points safety harness with a central lock

7.6 Baggage compartment

Baggage compartment is space behind seats.

7.7 Canopy

Canopy is made from the clear Plexiglas. The canopy frame is formed by a composite profile. The canopy is tilted forward.


7.8 Engine

There is installed Rotax 912 engine in VL-3 evolution aeroplane.
Rotax 912 is 4 stroke, 4 cylinder horizontally opposed, spark ignition engine.

7.9 Fuel system

The main fuel tanks are an integral part of the wings, a fuel quantity sensor is located inside the wing. Further a coarse filter, fuel valve, and fine filter are parts of the fuel system.

For draining of main fuel tanks use drain valves located on the bottom of the wing.

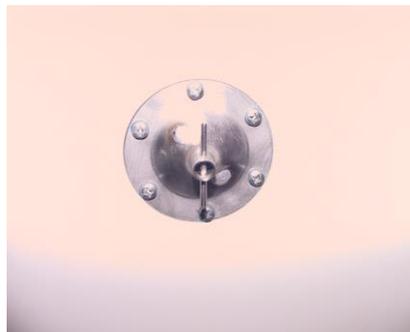

VL-3E-1 Pilot Operating Handbook

7.10 Electrical system

Complete electric documentation you can find in the „Aeroplane electric documentation“

7.11 Hydraulic system

The hydraulic system of aircraft consist of hydraulic power unit, 3 hydraulic actuators, 3 hydraulic locks, 2 throttle-valves, emergency hand pump and hydraulic hoses. The hydraulic system is filled with hydraulic liquid Shell Aerofluid 41. For the proper functioning of the hydraulic system during the aircraft operation must be periodically checked correct level of hydraulic liquid!

Maintenance of hydraulic system is mentioned in Maintenance Manual VL-3. In case of problems with the hydraulic system immediately contact VL-3 service center.

7.12 Pitotstatic system

The pitot-static system consists of a Prandtl tube under the wing, pressure lines (plastic pipes) for connection with airspeed indicator, altimeter and avionic pressure transducer. For more informantion please see aeroplane VL-3 Maintenance Manual.

7.13 Miscellaneous equipment

Besides the standard instruments the VL-3 evolution aeroplane is fitted with the following equipment:

- See chapter 7.3 Instrument panel

7.14 Avionics

Flight instruments :

- See chapter 7.3 Instrument panel

Engine instruments :

- See chapter 7.3 Instrument panel

VL-3E-1 Pilot Operating Handbook

8. Aeroplane handling, servicing and maintenance

8.1 Introduction

This section contains factory-recommended procedures for proper ground handling and servicing of the aeroplane. It also identifies certain inspection and maintenance requirements which must be followed if the aeroplane is to retain that new-plane performance and dependability. It is wise to follow a planned schedule of lubrication and preventive maintenance based on climatic and flying conditions encountered.

8.2 Aeroplane inspection periods

For more information about servicing, Maintenance and periodical inspections of aeroplane see VL-3 Maintenance Manual.

8.3 Aeroplane alterations or repairs

It is essential that the aeroplane manufacturer be contacted prior to any alternations on the aeroplane to ensure that airworthiness of the aeroplane is not compromised.

WARNING!

If the aeroplane weight is affected by an alternation, a new weight and balance measurement must be done! A revised "Weight and Balance Record / Permitted payload range" and Placard "LOAD LIMITS" must be filled out and attached to the aeroplane!

8.4 Ground handling / Road transport

8.4.1 Towing

It is easy to tow the aeroplane a short distance by holding the wings or fuselage, because the empty weight of this aeroplane is relatively low. Suitable surfaces to hold the aeroplane airframe are the rear part of the fuselage before the fin and wing roots.

You can also use hand towing bar for aeroplane moving.

Caution

Avoid excessive pressure at the aeroplane airframe - especially at the wing tips, elevator, rudder, trim etc.

Caution

Handle the propeller by holding the blade root - never the blade tip! If starting the engine manually - always handle the propeller on a blade surface i.e. do not hold only an edge

8.4.2 Parking

It is advisable to park the aeroplane inside a hangar or eventually inside other weather proof space (such as a garage) with a stable temperature, good ventilation, low humidity and dust-free environment. It is necessary to tie-down the aeroplane when parking outside.

When the plane must be tied-down outdoors for extended periods, it is advisable to cover the canopy, and if possible, the entire aeroplane using a suitable cover. For parking use parking brake.

VL-3E-1 Pilot Operating Handbook

8.4.3 Tying-Down

The aeroplane is usually tied-down after a flight day or when needed. The tying-down is necessary to protect the aeroplane against possible damage caused by wind gusts. For this reason is the aeroplane equipped by 2 tying lugs on the wing tips.

Procedure of tying-down:

1. Check the following:
 - Fuel valve - off
 - Circuit breakers - off
 - Master switch - off
 - Avionic master - off
 - Ignition box - off
2. Block the control stick up (by means of safety harness)
3. Close and lock cockpit
4. Close all the ventilation windows
5. Tie-down both wings of the aeroplane to the ground by the strips. It is also necessary to tie-down the fuselage rear and nose wheel landing gear (lace a rope through the wheel and fork).

Note

It is advisable to cover cockpit canopy, if possible the whole aeroplane, by means of a suitable covering material attached to the airframe for long term outside parking.

8.4.4 Lifting

Because the empty weight of this aeroplane is relatively low it is easy to lift the aeroplane using 2 persons. On the aeroplane are 3 supporting point - 2 points on the front of fuselage, on the lower side of engine frame and 1 point back on the underside of the fuselage.

Caution

Never lift the aeroplane by the wing tips or tail units!

Procedure of lifting:

1. Prepare 3 suitable jacks for aeroplane support.
2. Press-down the rear of the fuselage in front of the fin, lift the nose of the aeroplane and support under the firewall by 2 jackss.
3. To lift the rear of the fuselage grab the fuselage near the auxiliary tail skid, lift it upward and support end of fuselage by 1 jack.

8.4.5 Road transport

The aeroplane may be transported in a suitable trailer. It is necessary to dismantle the aeroplane before loading - the wings (and also tail units - if it is necessary) must be disasssembled according the procedures described in aeroplane Maintenance Manual. The aeroplane wings and tail units must be safely placed to prevent their damage during transport.

8.4.6 Aeroplane disassembly and assembly

For disassembly and assembly of the aeroplane - see the VL-3 Maintenance Manual.

VL-3E-1 Pilot Operating Handbook

9.3 Supplements inserted